





3/18 図3


(C)





































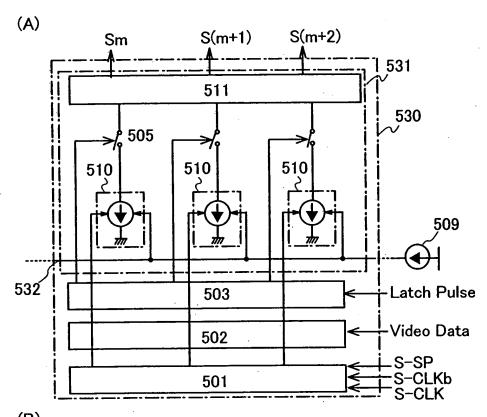


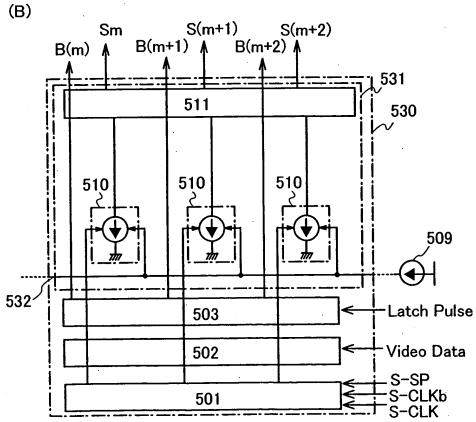


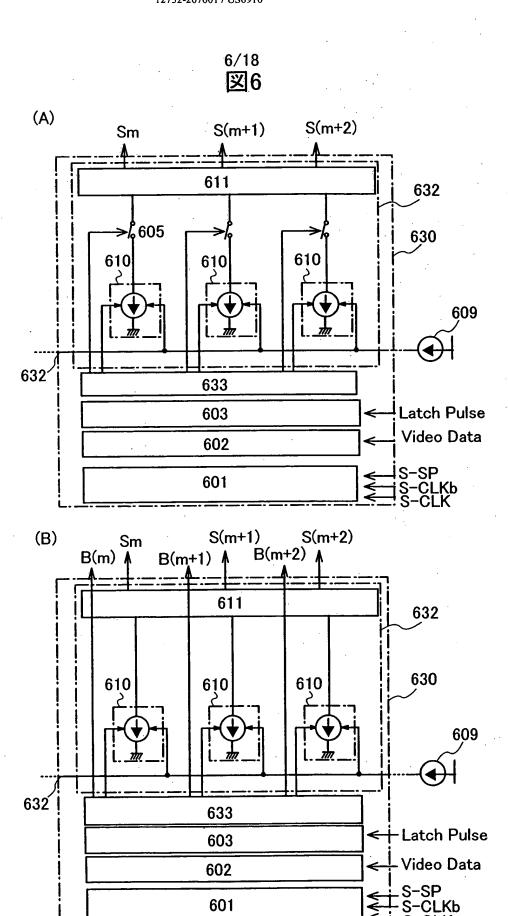


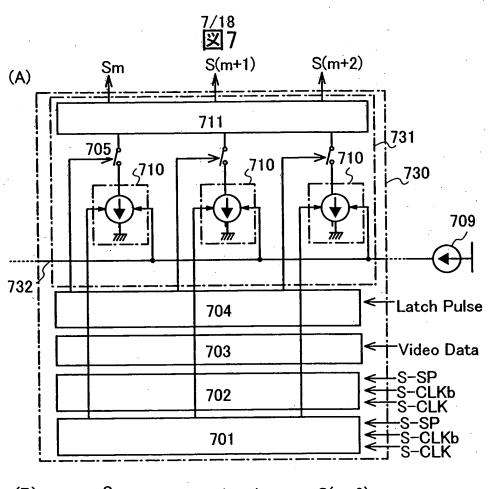

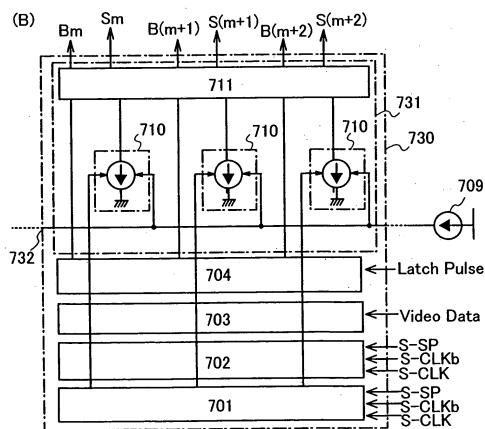


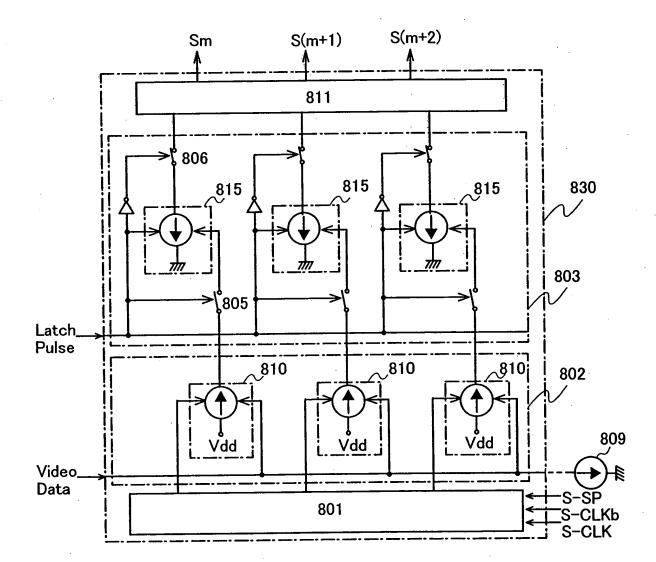

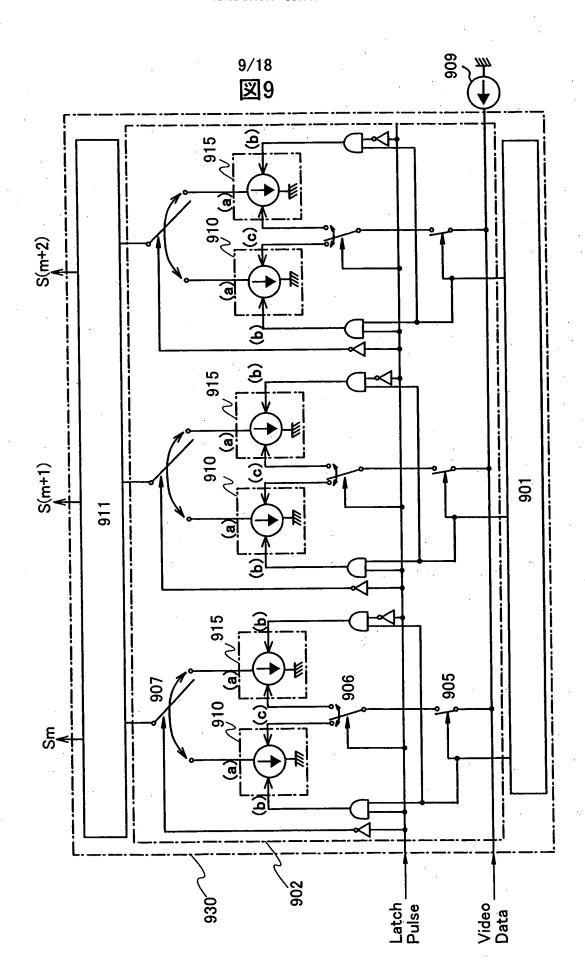


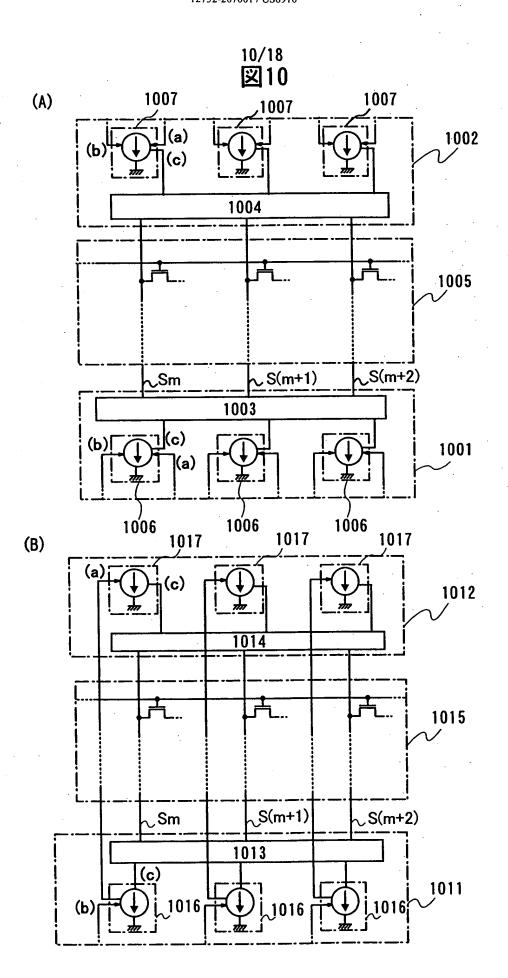


11/18 **図11**

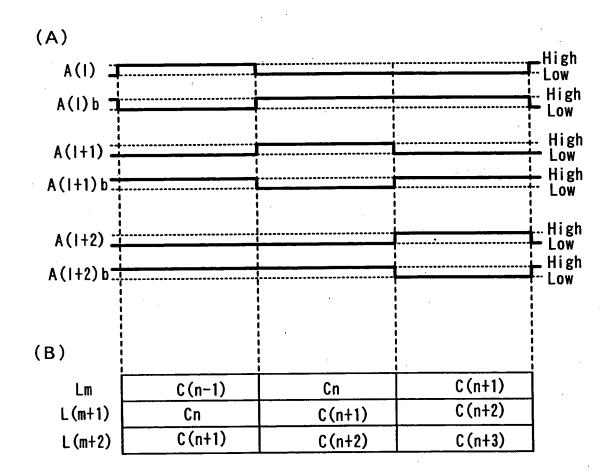



12/18 **図12**

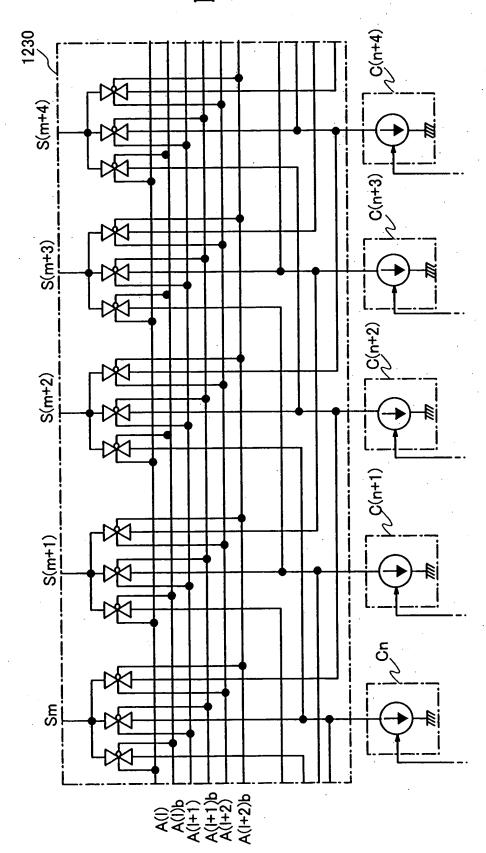


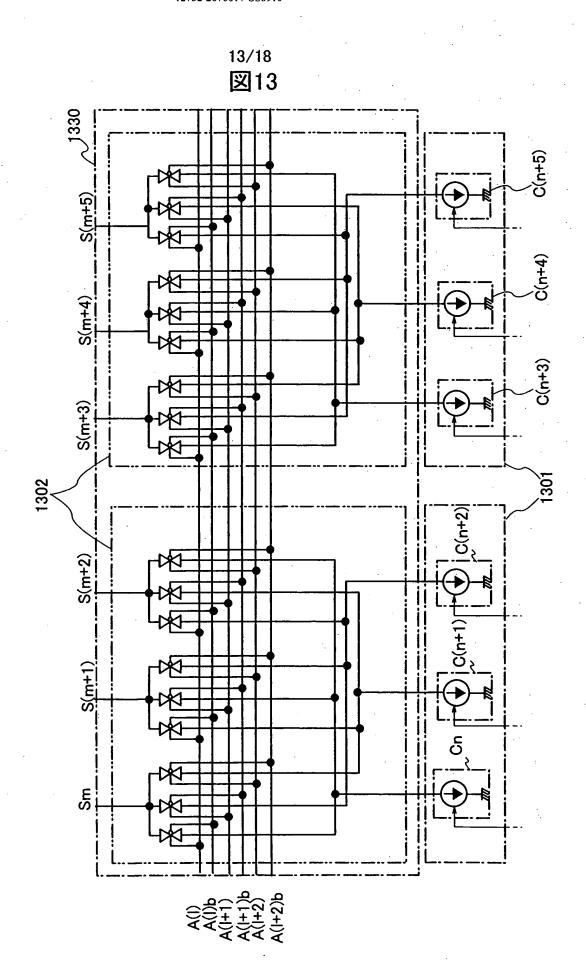


14/18 **図14**

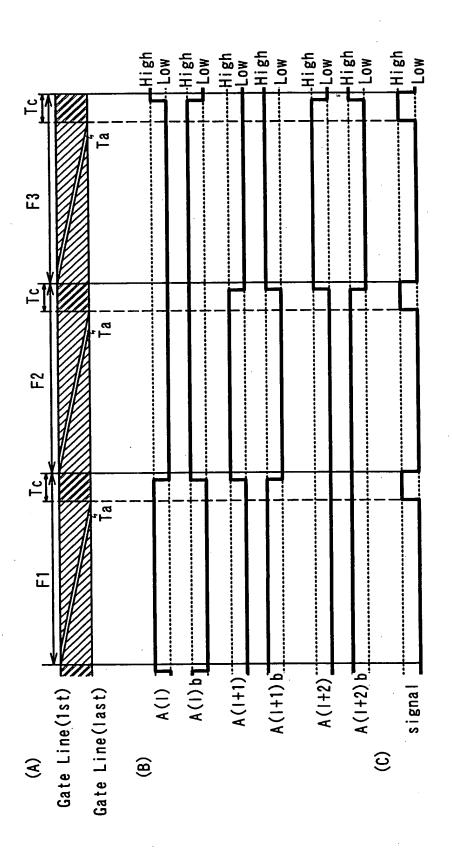

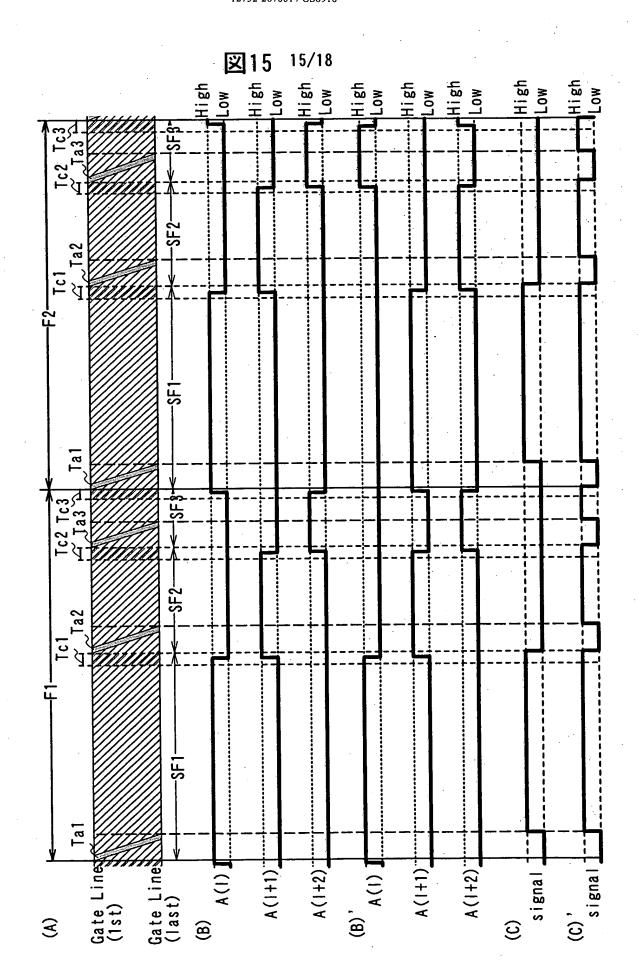

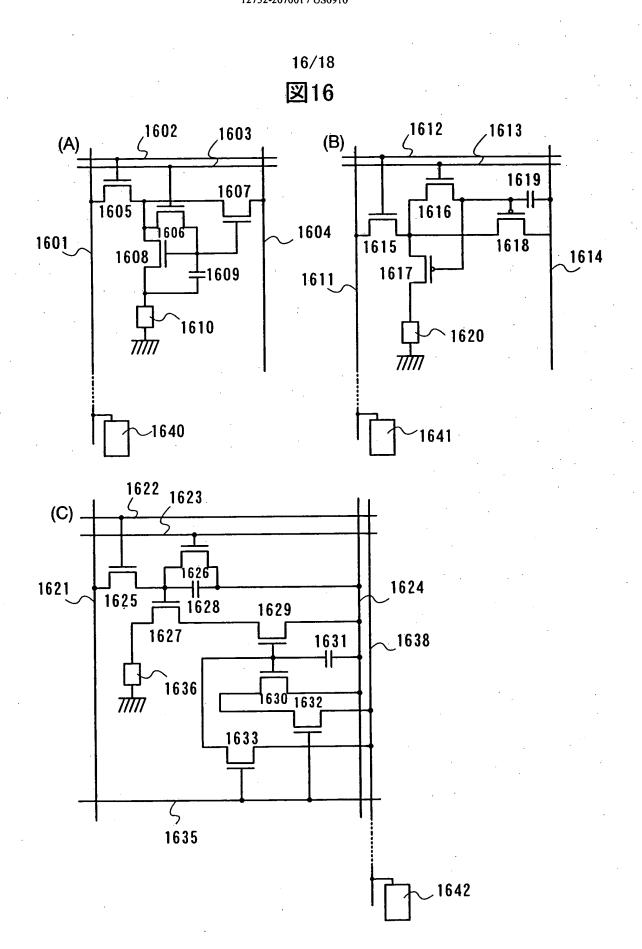

Page 17 of 18
A CURRENT SOURCE CIRCUIT, A SIGNAL LINE DRIVER CIRCUIT AND A DRIVING METHOD THEREOF AND A LIGHT EMITTING DEVICE Hajime Kimura et al. 12732-207001 / US6910

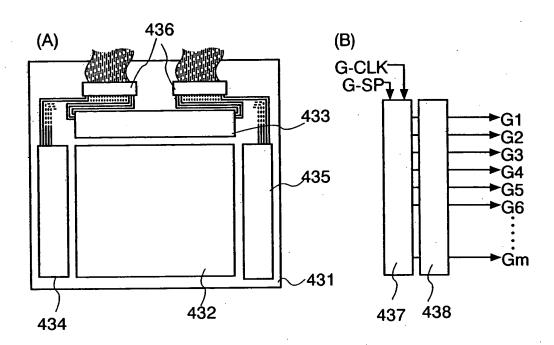

18/18 図18

